

CABLE CLEATS



Info

The **Stainless Steel Locking Strap Cleat** is an effective option for protecting against lower to medium short circuit fault current requirements in harsh environments. The strap is made of 316L stainless steel, has inherent cable range-taking, and is compatible with quad, trefoil, and multicore cables.


The cleat is installed after running the cable via a unique in the industry mounting bracket. It is tensioned and cut using a battery-operated, electromechanical or manually-operated, ratchet-style installation tool. The straps have rounded edges to protect from damaging the cable and are often used in combination with a cushion sleeve inserted between the strap and cable for added protection.

Mounting Brackets for Easy Installation and Labor Savings

Install cable cleats after the cable is pulled with Panduit mounting brackets that affix to the cable tray and cleat after the cable is run in the tray.

UC Series Brackets work in concert with Panduit's unique MLT Series Locking Strap Cleats and MS75 Series Buckle Strap Cleats.

GALLERY IMAGES

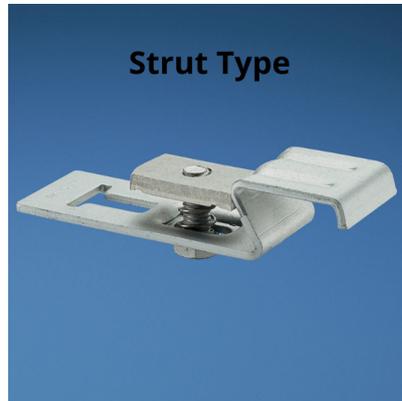

BESKRIVNING

Locking strap cleat

Partnumber	Trefoil Double Loop Cable Diameter Range	Flat Multicore Double Loop Cable Diameter Range	Width	Thickness	Length	Pkg. Qty
MLT4DH-L316	12mm to 42mm	12mm to 95mm	7,9mm	0,25mm	711mm	50
MLT4DH-L	12mm to 42mm	12mm to 95mm	7,9mm	0,25mm	711mm	50
MLT4DEH15-Q316	12mm to 42mm	12mm to 95mm	12,7mm	0,38mm	749mm	25
MLT4DSH-Q316	12mm to 42mm	12mm to 95mm	15,9mm	0,38mm	749mm	25
MLT4DSH-Q	12mm to 42mm	12mm to 95mm	15,9mm	0,38mm	749mm	25
MLT5DH-L316	42mm to 58mm	95mm to 120mm	7,9mm	0,25mm	863mm	50
MLT6DEH15-Q316	42mm to 72mm	95mm to 150mm	12,7mm	0,38mm	1054mm	25
MLT6DSH-Q316	42mm to 72mm	95mm to 150mm	15,9mm	0,38mm	1054mm	25
MLT6DSH-Q	42mm to 72mm	95mm to 150mm	15,9mm	0,38mm	1054mm	25
MLT6DH-L316	58mm to 72mm	120mm to 150mm	7,9mm	0,25mm	1016mm	50
MLT8DEH15-Q316	72mm to 100mm	150mm to 195mm	12,7mm	0,38mm	1359mm	25
MLT8DSH-Q316	72mm to 100mm	150mm to 195mm	15,9mm	0,38mm	1359mm	25
MLT8DSH-Q	72mm to 100mm	150mm to 195mm	15,9mm	0,38mm	1359mm	25

Mounting brackets

Partnumber	Description	Pkg. Qty
UCSQ1-VC	Strut Type, galvanized steel.	5
UCRND1-VC	Round, galvanized steel.	5
UCIB1-VC	I-Beam, galvanized steel.	5
UCTH1-VC	Top Hat, galvanized steel.	5
UCFG1-V316	Use with composite fiberglass cable trays, 316L stainless steel.	5
UCSQ1-V316	Strut Type, 316L stainless steel.	5
UCRND1-V316	Round, 316L stainless steel.	5
UCIB1-V316	I-Beam, 316L stainless steel.	5
UCTH1-V316	Top Hat, 316L stainless steel.	5

Cushion sleeve

Partnumber	Description	Length	Width	Pkg. Qty
PCSLSH-B-CR	Cushion sleeving used with locking strap cleats and buckle strap cleats.	30,5mm	26,8mm	1